








Openness 1 %

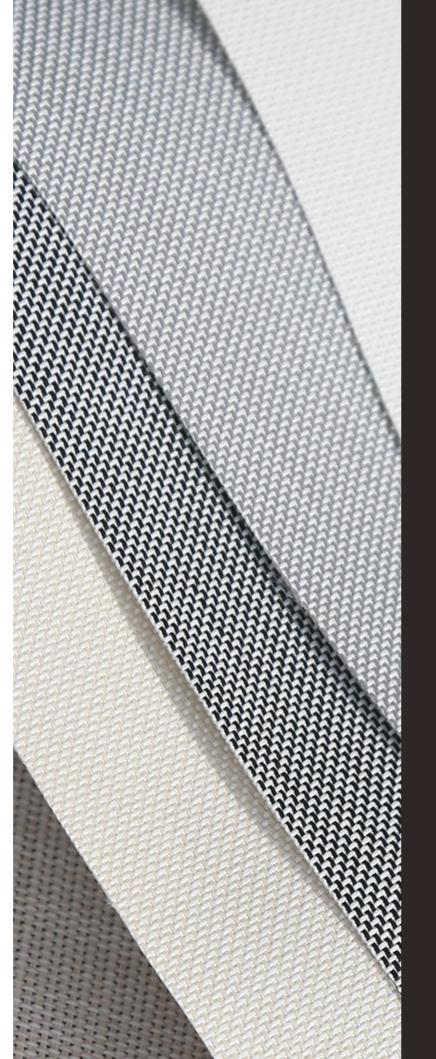

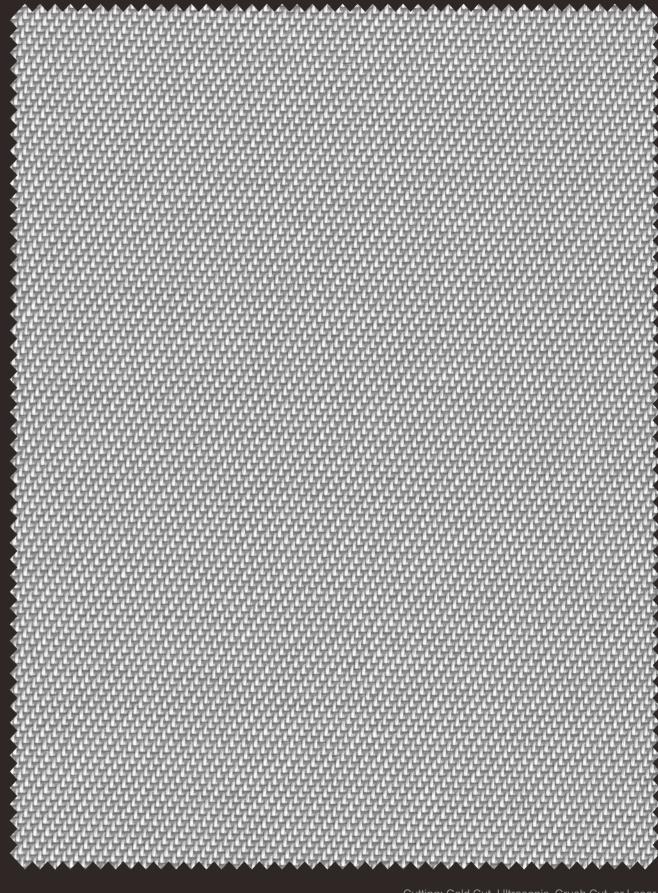



## **HELIOS**

SC-A7-101



SC-A7-102





SC-A7-103 SC-A7-104

## TECHNICAL PARAMETER

COMPOSITION 30%Polyester + 70%PVC

FINISHED WIDTH 118 inch

THICKNESS 0.029" ± 5%

**WEIGHT** 15.46 oz/yd<sup>2</sup> ± 5 %

COLOR FASTNESS 8 Grade

YARN COUNT 82 \* 34

BREAKING STRENGTH Warp 2740 N/5cm Weft 1200 N/5cm

## PRODUCT CERTIFICATION

**HEALTH CERTIFICATION** GREENGUARD GOLD, REACH, CHINA ENVIRONMENTAL LABELLING,

GB/T 2912.1-2009、SGS

BACTERIA AND ASTM G21

**FUNGAL RESISTANCE** GB/T 31402-2015/ISO 22196:2007(IDT)

FIRE RESISTANCE B1 (CHINA), NFPA701 (USA)

COLOR FASTNESS 8 Grade

WARRANTY 5-years

FABRICATION METHODS Cutting: cold cut / ultrasonic / crush cut

Seaming / Hemming: thermal / high-frequency / ultrasonic / sewing

**CARE AND CLEANING** Remove dust with vacuum cleaner or compressed air.

Do not use solvents or any abrasive substance which might damage the coating of the fabric.

Rinse with clean water. Leave the shade down until completely dry.

You can also rub the fabric very gently with a clean white pencil eraser to remove small stains.

















